

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

310.1019

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/786841

INTERNATIONAL APPLICATION NO.

PCT/NL99/00562

INTERNATIONAL FILING DATE

10 September 1999

PRIORITY DATE CLAIMED

11 September 1998

TITLE OF INVENTION

A SYSTEM FOR DETECTING THE PRESENCE OF MOISTURE

APPLICANT(S) FOR DO/EO/US

van de Berg, Jan; de Haan, Peter Hillebrand

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☐ Other items or information:

"Express Mail" mailing label no. FL6966545305
Date of Deposit: MARCH 9, 2001

I hereby certify that this correspondence and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above, in an envelope addressed to "Assistant Commissioner of Patents, Washington, D.C. 20231".

ROBERTS & MERCANTI, L.L.P.

BY

Michael N. Mercanti

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/786841

INTERNATIONAL APPLICATION NO.

PCT/NL99/00562

ATTORNEY'S DOCKET NUMBER

310.1019

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,000.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**\$860.00**

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	19 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>

\$0.00**\$0.00****\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$990.00**

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).

☐**\$0.00****SUBTOTAL =****\$990.00**

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

+

\$0.00**TOTAL NATIONAL FEE =****\$990.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

☐**\$0.00****TOTAL FEES ENCLOSED =****\$990.00**

Amount to be:	\$
refunded	
charged	\$

- ☐ A check in the amount of _____ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. **50-0217** in the amount of **\$990.00** to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **50-0217** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Michael N. Mercanti
ROBERTS & MERCANTI, L.L.P.
EDC II
 105 Lock Street, Suite 203
 Newark, New Jersey 07103
 Phone: 973-621-0660
 Fax: 973-621-0774

**022856**

PATENT TRADEMARK OFFICE

SIGNATURE

Michael N. Mercanti

NAME

33,966

REGISTRATION NUMBER

March 9, 2001

DATE

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): van de Berg, Jan, et al.

Docket No.

310.1019

Serial No.
09/786,841Filing Date
March 9, 2001Examiner
UnknownGroup Art Unit
Unknown

Invention: A SYSTEM FOR DETECTING THE PRESENCE OF MOISTURE

I hereby certify that the following correspondence:

Petition for an Extension of Time (3 month) (1 page, in duplicate)

(Identify type of correspondence)


is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

September 19, 2001

(Date)

Michael N. Mercanti

(Typed or Printed Name of Person Mailing Correspondence)



(Signature of Person Mailing Correspondence)

09/24/2001 MKAYPAGH 00000007 500217 09786841

01 FC:117 890.00 CH

EL 869 002 405 US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

PETITION FOR EXTENSION OF TIME UNDER 37 CFR 1.136(a)
(Large Entity)

Docket No.
310.1019

In Re Application Of: **van de Berg, Jan, et al.**

Serial No.
09/786,841

Filing Date
March 9, 2001

Examiner
Unknown

Group Art Unit
Unknown

Invention: **A SYSTEM FOR DETECTING THE PRESENCE OF MOISTURE**

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

This is a request under the provisions of 37 CFR 1.136(a) to extend the period for filing a response to the Office Action of **April 19, 2001** above-identified application.
Date

The requested extension is as follows (check time period desired):

☐ One month ☐ Two months ☒ Three months ☐ Four months ☐ Five months

from: **June 19, 2001** until: **September 19, 2001**
Date *Date*

The fee for the extension of time is **\$890** and is to be paid as follows:

- ☐ A check in the amount of the fee is enclosed.
☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment, to Deposit Account No. **50-0217**
A duplicate copy of this sheet is enclosed.
☒ If an additional extension of time is required, please consider this a petition therefor and charge any additional fees which may be required to Deposit Account No. **50-0217**
A duplicate copy of this sheet is enclosed.


Signature

Dated: **September 19, 2001**

Michael N. Mercanti
Registration No. 33,966
ROBERTS & MERCANTI, L.L.P.
EDC II
105 Lock Street, Suite 203
Newark, New Jersey 07103
Phone: 973-621-0660
Fax: 973-621-0774

I certify that this document and fee is being deposited on _____ with the U.S. Postal Service as first class mail under 37 C.F.R. 1.8 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Signature of Person Mailing Correspondence

Typed or Printed Name of Person Mailing Correspondence

CC:

310.1019

UNITED STATES PATENT & TRADEMARK OFFICE

Examiner: Unknown Art Unit: Unknown
Re: Application of: van de Berg, Jan, et al.
Serial No.: to be assigned
Filed: herewith
For: **A SYSTEM FOR DETECTING THE PRESENCE OF
MOISTURE**

PRELIMINARY AMENDMENT

Assistant Commissioner
for Patents
Washington, D.C. 20231

March 9, 2001

Sir:

Prior to the examination, the Applicants submit the following claims:

1. A system (1) for detecting the presence of moisture, comprising at least one electronic sensor (2.i) for detecting the presence of moisture and at least one reading device (4.1) for obtaining information from the at least one sensor about the presence of moisture, wherein the at least one sensor (2.i) comprises a resonant circuit (6) which is at least partly formed from a moisture sensitive material (8), the electrical resistance of which changes when the material (8) comes into contact with moisture, the reading device (4.1) comprises means (14) for generating an electromagnetic interrogation field comprising at least one frequency component corresponding to a resonance frequency of the resonant circuit (6) and for recording the response of the at least one sensor (2.i) to the electromagnetic interrogation field to obtain information about the presence of moisture at the at least one sensor, characterized in that, the electrical resistance of the material (18) increases when the material comes into contact with moisture and the reading device (4.1) comprising transmitter-receiver means (14) for wirelessly generating the electromagnetic interrogation field and for wirelessly recording the response of the at least one sensor (2.i) to the electromagnetic interrogation field to obtain the information about the presence of moisture at the at least one sensor (2.i) if the at least one sensor (2.i) is wirelessly brought into the electromagnetic interrogation field.

09/786841-091901

2. A system according to claim 1, characterized in that the moisture sensitive material (8) is included in the resonant circuit (6) in such a manner that the Q factor of the resonant circuit (6) decreases when the resistance of the moisture sensitive material (8) increases.

3. A system according to claim 1, characterized in that the moisture sensitive material (8) is included in the resonant circuit (6) in such a manner that the Q factor of the resonant circuit (6) increases when the resistance of the moisture sensitive material (8) increases.

4. A system according to claim 1, characterized in that the resonant circuit at (6) least comprises an LC circuit (10,12).

5. A system according to claim 4, characterized in that the entire LC circuit (10,12) or at least part of the LC circuit (10,12) is built up from the moisture sensitive material (8).

6. A system according to claim 1, characterized in that the moisture sensitive material (8) comprises a binding agent capable of swelling in moisture, in which binding agent electrically conductive particles are included.

7. A system according to claim 1, characterized in that the moisture sensitive material (8) comprises a binding agent in which particles capable of swelling in moisture and electrically conductive particles are included.

8. A system according to claim 1, characterized in that the moisture sensitive material (8) is arranged on a carrier material in the form of a coating.

9. A system according to claim 4, characterized in that at least part of the LC circuit (10,12) is formed by the coating.

10. A system according to claim 1, characterized in that the transmitter-receiver means (14) are designed as a transmission system for detecting an electromagnetic response signal generated by the at least one sensor (2.i), in response to the electromagnetic interrogation field.

11. A system according to claim 10, characterized in that, in use, the reading device (4.1) determines on the basis of the intensity of the detected response signal to what extent the at least one sensor (2.i) is in contact with moisture.

12. A system according to claim 2, characterized in that the reading device (4.1) comprises a threshold circuit to determine whether the detected intensity is below a predetermined value.

13. A system according to claim 1, characterized in that the transmitter-receiver means (14) are designed as an absorption system for detecting energy taken up from the interrogation field by the at least one sensor (2.i) in response to the electromagnetic interrogation field.

14. A system according to claim 13, characterized in that, in use, the reading device (4.1) determines on the basis of the amount of energy absorbed by the at least one sensor (2.i) to what extent the at least one sensor (2.i) is in contact with moisture.

15. A system according to claim 2, characterized in that the reading device (4.1) comprises a threshold circuit (18) to determine whether the amount of energy absorbed is below a predetermined value.

16. A system according to claim 1, characterized in that the reading device (4.1) generates an alarm signal when moisture is detected by means of the at least one sensor.

17. A system according to claim 1, characterized in that the system (1) is also designed as an identification system in which the at least one sensor (2.i) comprises a microprocessor (22) connected with the resonant circuit (6), in which microprocessor (22) an identification code is stored, which identification code is passed to the resonant circuit (6) when the resonant circuit (6) is resonated by the electromagnetic interrogation field, and the reading device (4.1) being arranged to read the identification code by means of the electromagnetic interrogation field.

18. A system according to claim 1, characterized in that the system further comprises a central control unit (24) which is, optionally wirelessly, connected with the at least one reading device (4.1) for obtaining information about the presence of moisture at the at least one sensor (2.i).

19. A sensor (2.i) of the system according to claim 1.

REMARKS

This amendment is being submitted to remove all multiple dependent claims which were presented during the international phase of the PCT for this application and examined as a part of the International Preliminary Examination Report (IPER) and stamped "05 12 2000" by the EPO. The specific changes made to the IPER claims are shown in Appendix A attached herewith. Applicants do not wish to present the multiple dependent claims during the United States national phase. It is respectfully submitted that no new matter has been entered and that the present application is in all respects complete and in condition for favorable consideration. If the Examiner has any questions regarding the amendments presented herein, it is requested that the Examiner contact the undersigned at the telephone number shown below.

An early and favorable action on the merits is earnestly solicited.

Respectfully submitted,

ROBERTS & MERCANTI, L.L.P.

By: 
Michael N. Mercanti
Reg. No. 33,966

ROBERTS & MERCANTI, L.L.P.
EDC II
105 Lock Street, Suite 203
Newark, New Jersey 07103
Phone: 973-621-0660
Fax: 973-621-0774

"Express Mail" mailing label no. EL 696 654 533 US
Date of Deposit: March 9, 2001
I hereby certify that this correspondence and/or fee
is being deposited with the United States Postal Service
"Express Mail Post Office to Addressee" service under 37
CFR 1.10 on the date indicated above, in an envelope
addressed to: "Assistant Commissioner for Patents,
Washington, DC 20231".

ROBERTS & MERCANTI, L.L.P.

By: 
Michael N. Mercanti

PTO/PCT Rec'd 9 MAR 2001

05. 12. 2000

1.

09/786841

Title: A system for detecting the presence of moisture.

The invention relates to a system for detecting the presence of moisture, comprising at least one electronic sensor for detecting the presence of moisture and at least one reading device for obtaining information from the at least one sensor about the presence of moisture, wherein the at least one sensor comprises a resonant circuit which is at least partly formed from a moisture sensitive material, the electrical resistance of which changes when the material comes into contact with moisture, the reading device comprises means for generating an electromagnetic interrogation field comprising at least one frequency component corresponding to a resonance frequency of the resonant circuit and for recording the response of the at least one sensor to the electromagnetic interrogation field to obtain information about the presence of moisture at the at least one sensor.

Such a system is known from DE 40 30 284. In the known system the reading device is provided with a measuring circuit comprising a transformer connected to the resonance circuit. The resonant circuit comprises a material from which the electrical resistance increases when the material comes into contact with moisture.

It is a drawback of the known system that the information generated by the sensor about the presence of moisture is often not sufficiently reliable. Moreover, such a system is rather expensive and thus less suitable for use as a disposable sensor, because the reading device and the sensor are part of one and the same device. Furthermore the system is not suitable for wirelessly obtaining information about the presence of moisture.

The invention has for its object, inter alia, to meet the above drawbacks and, furthermore, to provide a number of advantages.

The system according to the invention is accordingly characterized in that the electrical resistance of the material (18)

2.

increases when the material comes in to contact with moisture and the reading device (4.1) comprising transmitter-receiver means (14) for wirelessly generating the electromagnetic interrogation field and for wirelessly recording the response of the at least one sensor (2.i) to the electromagnetic interrogation field to obtain the information about the presence of moisture at the at least one sensor (2.i). if the at least one sensor (2.i) is wirelessly brought into the electromagnetic interrogation field.

It has been found that the effect of moisture on the moisture sensitive material and thus the presence of moisture at the sensor can be recorded very sensitively and accurately. When the moisture sensitive material comes into contact with moisture, the electrical resistance will increase. Because of the increase in the electrical resistance, the electrical properties of the resonant circuit will change and the response of the resonant circuit to the interrogation field will thereby also change. In this connection it is even conceivable that in this manner not only the presence of moisture at the sensor is detected, but that even an impression can be obtained of the amount of moisture present at the sensor.

The sensor according to the invention can be used, inter alia, in baby diapers, incontinence diapers, sanitary towels, incubators, packages for vegetables and fruit, on the road surface for detection of rain and at a substratum in the cultivation under glass. It is also possible to use the sensor in drying processes, such as, for instance, in the paper industry.

GB 21 92 059 discloses a system comprising a wetness sensor for wirelessly reading the wetness sensor. The system is for measuring the moisture content of oil in a container. The wetness sensor comprises a moisture detector, an active transmitter and an antenna for generating a modulation of the transmission signal according to the resistance of the moisture detector by changing the q-factor of the antenna. In this known system energy is supplied to the sensor by means of mechanical vibration submitted to an outerwall of the container comprising the sensor.

3.

EP-A-0 329 436 discloses a moisture and dew detection sensor comprising a fabric and a moisture sensing resistive substance adhered in a substantially continued and dispersed state to the fabric.

The resistance of the fabric increases if it comes into contact with moisture. Furthermore the resistance of the fabric is measured by a non-wireless connection to a measuring unit. The system is however not provided with a reading unit which generates an interrogation field with a frequency which corresponds with a resonance frequency of a resonance circuit of the sensor so that the resonance circuit is brought in resonance by means of the interrogation field.

Preferably, it applies that the moisture sensitive material is included in the resonant circuit in such a manner that the Q factor of the resonant circuit decreases when the resistance of the moisture sensitive material increases. The Q factor of the intact dry sensor is therefore high. This means that the sensor can be properly detected in this condition. The system can therefore also be used to check whether a sensor is present in the product (such as, for instance, a diaper). This possibility is not present at the above prior art sensor, because this sensor does not react when no short circuit is present between the two electrodes.

A further advantage is that the change in the characteristic of the sensor is reversible. When the sensor dries again, the resistance of the moisture sensitive material will decrease.

In the above special embodiment this means that the Q factor of the resonant circuit increases again.

According to a special embodiment it applies that the resonant circuit at least comprises an LC circuit. In this connection the entire LC circuit or at least part of the LC circuit may be built up from the moisture sensitive material.

In particular, it applies that the moisture sensitive material comprises a binding agent capable of swelling in moisture, in which

4A.

binding agent electrically conductive particles are included. It is also possible that the moisture sensitive material comprises a binding agent in which particles capable of swelling in moisture and electrically conductive particles are included. In both cases moisture ensures a swelling of respectively the binding agent and the particles capable of swelling. Consequently, the electrically conductive particles will be drawn apart and the conductivity of the moisture sensitive material will decrease so that the electrical resistance of the material increases.

In particular, it applies that the reading device generates an alarm signal when moisture is detected by means of the sensor.

According to a very advanced embodiment of the invention the system is also designed as an identification system in which the at least one sensor comprises an active electronic circuit connected with the resonant circuit, such as a microprocessor in which an identification code is stored, which identification code is passed to the resonant circuit when the resonant circuit is resonated by the electromagnetic interrogation field, and the reading device being arranged to read the identification code by means of the electromagnetic interrogation field.

This system can, for instance, advantageously be used in a hospital, the sensor being used to record moisture in a mattress of a hospital bed. Each sensor may then comprise an identification code belonging to a specific hospital bed. In this manner it is not only possible to record that a mattress has become wet, but also which mattress has become wet.

The system may further comprise a central control unit which is, optionally wirelessly, connected with the at least one reading device for obtaining information about the presence of moisture at the at least one sensor.

In the example of the above hospital the central control unit can be installed, for instance, in the room of a nurse. The reading devices can

4B

be installed in the different rooms of the patients. In this manner it can be centrally recorded in which room which bed has got a wet mattress.

The invention will now be explained in more detail with reference to the drawing, in which:

Fig. 1 shows a possible embodiment of a system for detecting the presence of moisture according to the invention;

Fig. 2 shows the transfer characteristic of a resonant circuit of a sensor of the system of Fig. 1;

Fig. 3 shows a first alternative embodiment of a sensor of the system of Fig. 1;

Fig. 4a shows a second alternative embodiment of a sensor of the system of Fig. 1;

Fig. 4b shows an electrical equivalent circuit diagram of the sensor of Fig. 4a;

Fig. 5a diagrammatically shows a relatively dry condition of the moisture sensitive material of one of the sensors of Figs. 1, 3, 4a and 4b; and

Fig. 5b shows the moisture sensitive material of Fig. 5a, when this is relatively moist.

In Fig. 1 a system for detecting the presence of moisture is indicated by reference numeral 1. The system comprises a number of electronic sensors 2.i ($i = 1, 2, \dots, n$) for detecting the presence of moisture. The system further comprises at least one reading device 4.1 for obtaining

The text continues on page 5 of the original text.

Each of the sensors 2.i comprises a resonant circuit 6 shown in dotted lines, which is at least partly formed from a moisture sensitive material 8. In this example the resonant circuit comprises an LC circuit 10, 12, in which the moisture sensitive material 8 is included. The moisture sensitive material is of a type of which the electrical resistance increases when the material comes into contact with moisture.

The reading device 4.1 comprises transmitting and receiving means 14 for generating an electromagnetic interrogation field. The electromagnetic interrogation field comprises at least one frequency component which corresponds to a resonance frequency of the resonant circuit 6. In this example the resonant circuit has only one resonance frequency f_0 . The electromagnetic interrogation field then also has one frequency f_0 . It is explicitly observed that it is also possible that the electromagnetic interrogation field comprises more frequencies, for instance, because it can be shifted in frequency.

The operation of the apparatus is as follows. To check whether moisture is present at the sensor 2.i, the electromagnetic interrogation field is transmitted by means of transmitter-receiver unit 14 at the frequency f_0 . When the sensor is not moist, this means that the resistance of the moisture sensitive material 8 is low. This means that the Q factor of the LC circuit is high. When the resonant circuit is therefore brought into the interrogation field, the resonant circuit will start to resonate and therefore to vibrate at the frequency f_0 . By means of the transmitter-receiver unit 14 it is recorded that the resonant circuit 6 is in vibration. The information about the presence of moisture at sensor 2.i thus wirelessly obtained by the transmitter-receiver unit 14 is passed via line 16 of the reading device 4.1 to a signal processing unit 18 of the reading device.

The signal processing unit 18 may, for instance, comprise a threshold circuit to determine whether the

response of the resonant circuit 6 is above or below a specific value. Is the response above this specific value, then it can be concluded that the sensor is dry, and is the response below this predetermined value, then it can be
5 concluded that the sensor is wet. In that case an alarm signal can be generated by the signal processing unit 18 in a known per se manner.

The moisture sensitive material 8 can be applied in different manners. Thus, for instance, the sensor 2.i can be
10 composed of a sheet-like carrier material 20, layers of conductive material forming the resonant circuit 6 being applied by known per se techniques. In this example this resonant circuit comprises, inter alia, a coil 10 and a capacitor 12. The coil 10 and the capacitor 12 can each be
15 made of, for instance, copper. The moisture sensitive material 8 can be arranged on the carrier material 20 as a separate resistor. Both the coil 10 and the capacitor 12 and the moisture sensitive resistor 8 are arranged in the form of traces.

20 It is also possible that the material of the LC circuit itself is made of moisture sensitive material. Such a resonant circuit is shown in Fig. 4a. In Fig. 4a at least part of the coil 10 and/or the capacitor 12 is therefore made of the moisture sensitive material.

25 Fig. 4b shows the electrical equivalent circuit diagram thereof, which therefore corresponds to the diagram of the sensor shown in Fig. 1.

The realization of the moisture dependent conductivity of the moisture sensitive material can be
30 obtained, for instance, by mixing electrically conductive particles D, preferably silver-containing, with a binding agent B capable of swelling in water, in such a manner that the particles D make a continuous contact, that is to say that the concentration of the particles rises above the
35 percolation limit (see also Fig. 5a). The layer thickness of the thus formed conductive coating 8 can be of the order of

what, for instance, can be applied with screen printing (10-500 μm). By contact with water the binding agent B will swell so that the electrically conductive particles are driven apart and the continuous contact is broken. That is to say that the concentration of the particles D falls below the percolation limit (see Fig. 5b).

Instead of a binding agent capable of swelling in water, particles capable of swelling in water can also be used in combination with the electrically conductive particles, while the employed binding agent itself need not be capable of swelling in water, but is water-sensitive to a greater or less degree. The nature and concentration of the particles capable of swelling as well as the nature and concentration of the binding agent are parameters adapted to adjust the velocity and degree of swelling. A specific characteristic of the material with respect to moisture can thus be obtained. Two examples of recipes for water-sensitive electrically conductive materials are:

Example 1:

Stabileze (0.5% in water)	50
water	10
glycerine (10% in water)	1.25
metalite silver SF 20	2.5
NaOH (10% in water)	0.25

layer thickness wet: 500 μm
 layer thickness dry: 100 μm
 response time: < 1 s

Example 2:

PA 18 polyanhydride resin (40% in MEK)	1.00
Stabileze (activated in NH_3),	
particles < 60 μm	0.25

09785841-091901
 T06T60-F488260

glycerine (20% in butanol)	1.00
metalite silver SF 20	1.50
MEK/butanol (1/1)	2.00

layer thickness wet: 300 μm
layer thickness dry: 170 μm
response time: ca. 45 s

As conductive particles different material types and forms of can be chosen. Examples are metals such as silver, copper, rvs, aluminum and zinc in forms like granules, fibers, flakes, globules etc. Also materials such as soot, graphite or intrinsically conductive polymer particles can be used in principle.

By properly composing the moisture sensitive coating material the moisture sensor can be made with standard coating and printing techniques like screen printing, ball printing, roller coating, spray coating etc.

As stated, the moisture sensitive material 8 can be included in the resonant circuit in such a manner that the Q factor of the resonant circuit decreases when the resistance of the moisture sensitive material increases.

In Fig. 2 curve A indicates the transfer function H of the resonant circuit 6 when the moisture sensitive material is dry, that is to say when the Q factor is high. Then B indicates the curve obtained when the moisture sensitive material is wet, which has the result that the Q factor decreases.

The transmitter-receiver means 14 can be designed as a transmission system for detecting an electromagnetic response signal generated by the sensor 2.i, in response to the electromagnetic interrogation field. In fact, when the resonant circuit is vibrated by the electromagnetic interrogation field, it will therefore transmit an electromagnetic response signal which can in turn be detected by the transmitter-receiver means 14. This is referred to as

09786841-091901
T06T60-14898760

09736341.091904

a known per se transmission system. The signal processing device 18 can determine by means of the intensity of the detected response signal to what extent the sensor 2.i is in contact with moisture. For the above sensor, to which it
5 applies that the Q factor decreases when the sensor comes into contact with water, the signal processing device 18 may comprise a threshold circuit to determine whether the detected intensity is below a predetermined value. Is it actually below a predetermined value, then it can be
10 concluded that the sensor 2.i is wet and, if desired, an alarm signal can be produced.

It is also possible, however, that the transmitter-receiver unit is designed as a known per se absorption system. When the resonant circuit 6 is vibrated by the
15 electromagnetic interrogation field, this energy will absorb from the electromagnetic interrogation field. This energy absorption can be detected in the transmitter-receiver unit 14 in a known per se manner. When the sensor is dry and therefore has a high Q factor, much energy will be taken up
20 from the interrogation field. On the other hand, when the sensor is moist, little or no energy will be taken up from the interrogation field.

Via line 16 information can again be supplied to the signal processing device 18 in the form of the amount of
25 energy taken up from the electromagnetic interrogation field. The reading device 41 can then determine on the basis of the amount of energy absorbed by the at least one sensor to what extent the at least one sensor is in contact with moisture. In particular, it applies again that the signal processing
30 device 18 comprises a threshold circuit to determine whether the amount of energy taken up is below a predetermined value.

Preferably, it applies that each sensor 2.i further comprises an active electronic circuit, such as a microprocessor 22 in which an identification code belonging
35 to the sensor 2.i is stored. The microprocessor is connected with the resonant circuit 6. When the resonant circuit is in

the interrogation field, a part of the currents generated in the resonant circuit can be rectified by means of, for instance, a diode 23 and supplied to the microprocessor 22. In reaction to this, the microprocessor will supply the stored identification codes to the resonant circuit. The response signal generated in the resonant circuit in response to the electromagnetic interrogation field is then modulated by means of the identification code. This identification code can be detected by the transmitter-receiver unit 14 and supplied to the signal processing unit 18. The signal processing unit 18 can then determine from which sensor 2.i a response has been detected. Such a system is highly important when it comprises, as in the present example, a plurality of sensors 2.i. When at a given moment the response of one or more sensors falls away, because the sensor in question comes into contact with moisture, it can be established by means of the reading device 4.1 which identification code is no longer received and, therefore, which sensor is in contact with moisture.

Such a system can advantageously be used in a hospital in which each mattress comprises a sensor 2.i. When one of the mattresses then becomes moist, this can be detected by means of the reading device 4.1, and moreover, it can be established which sensor and, therefore, which mattress is concerned. The nurse can then start changing the patient, if required.

The system can further be extended with a central control unit 24 and a plurality of reading devices 4.i ($i = 1, 2, \dots, m$). Each reading device 4.i is optionally wirelessly connected with the central control unit 24 to obtain information about the presence of moisture at one of the sensors 2.i. In use, a reading device 4.i can be installed, for instance, in each room of a hospital. Furthermore, a number of beds with mattresses are installed in each room, each of which mattresses comprises a sensor 2.i with a specific identification code. When one of the

mattresses in the rooms becomes moist, an alarm signal can thus be generated at the central control unit 24, so that a nurse can immediately establish which sensor has come into contact with moisture.

5 The invention is by no means limited to the above embodiments. Thus, for instance, the moisture sensitive material 8 can also be included in the resonant circuit in such a manner that the Q factor of the resonant circuit increases when the resistance of the moisture sensitive material increases. An example thereof is shown in Fig. 3. In 10 this example the moisture sensitive material 8 is parallel-connected to the LC circuit 10, 12 in the form of a resistor. When the sensor of Fig. 3 is dry, the resistance of the moisture sensitive material 8 will be low and thus in fact 15 cause a short circuit in the LC circuit 10, 12. This means that the sensor of Fig. 3 will hardly, if at all, react to the interrogation field when the sensor is dry. On the other hand, when the sensor comes into contact with moisture, the resistance of the moisture sensitive material will increase 20 and the short circuit will gradually be removed. This has the result that in this case the LC circuit will react when brought into the above interrogation field. This reaction can then be detected by means of the reading device, both when the reading device is designed as a transmission system and 25 as an absorption system. When, therefore, an electromagnetic response signal is received, when it is detected that energy is taken up from the electric interrogation field, it can be concluded that the sensor in question is wet.

 In the example of Fig. 3 the sensor again comprises 30 the microprocessor discussed before. When the sensor of Fig. 3 reacts, the identification code can then also be sent directly to the transmitter-receiver device, so that by means of the reading device it can be directly establish which sensor reacts, in other words which sensor is wet. The 35 transfer of the resonant circuit of Fig. 3 is therefore such that curve A of Fig. 2 is applicable when the sensor is wet

and curve B when the sensor is dry. It is also conceivable that each sensor 2.i comprises a resonant circuit with a unique resonance frequency f_i , with $f_i \neq f_j$ if $i \neq j$. By emitting an interrogation field, the frequency of which
5 increases in a previously known manner, it can be detected whether a sensor 2.i is moist, while at the same time the frequency f_i and thus the identity of a sensor can be established.

It is further also conceivable that other principles
10 are used, so that the electrical resistance of the material of the LC circuit is changed. By way of example, it can be mentioned that the electrical resistance of the intrinsically conductive polymers, such as polyaniline, polypyrrole or polythiophene, changes under the influence of water in which
15 salts or ions are included. In that case, in particular for instance, urine can be detected. It is explicitly mentioned that in each of the embodiments the microprocessor can be left out.

Such variants are each deemed to fall within the
20 scope of the invention.

09786641.091901

05.12.2000

13.

NEW CLAIMS

(65)

1. A system (1) for detecting the presence of moisture, comprising at least one electronic sensor (2.i) for detecting the presence of moisture and at least one reading device (4.1) for obtaining information from the at least one sensor about the presence of moisture, wherein the at least one sensor (2.i) comprises a resonant circuit (6) which is at least partly formed from a moisture sensitive material (8), the electrical resistance of which changes when the material (8) comes into contact with moisture, the reading device (4.1) comprises means (14) for generating an electromagnetic interrogation field comprising at least one frequency component corresponding to a resonance frequency of the resonant circuit (6) and for recording the response of the at least one sensor (2.i) to the electromagnetic interrogation field to obtain information about the presence of moisture at the at least one sensor, characterized in that, the electrical resistance of the material (18) increases when the material comes in to contact with moisture and the reading device (4.1) comprising transmitter-receiver means (14) for wirelessly generating the electromagnetic interrogation field and for wirelessly recording the response of the at least one sensor (2.i) to the electromagnetic interrogation field to obtain the information about the presence of moisture at the at least one sensor (2.i). if the at least one sensor (2.i) is wirelessly brought into the electromagnetic interrogation field

2. A system according to claim 1, characterized in that the moisture sensitive material (8) is included in the resonant circuit (6) in such a manner that the Q factor of the resonant circuit (6) decreases when the resistance of the moisture sensitive material (8) increases.

3. A system according to claim 1, characterized in that the moisture sensitive material (8) is included in the resonant circuit (6) in

14.

such a manner that the Q factor of the resonant circuit (6) increases when the resistance of the moisture sensitive material (8) increases.

4. A system according to any of the preceding claims, characterized in that the resonant circuit at (6) least comprises an LC circuit (10,12).

5. A system according to claim 4, characterized in that the entire LC circuit (10,12) or at least part of the LC circuit (10,12) is built up from the moisture sensitive material (8).

6. A system according to any of the preceding claims, characterized in that the moisture sensitive material (8) comprises a binding agent capable of swelling in moisture, in which binding agent electrically conductive particles are included.

7. A system according to any of the preceding claims, characterized in that the moisture sensitive material (8) comprises a binding agent in which particles capable of swelling in moisture and electrically conductive particles are included.

8. A system according to any of the preceding claims, characterized in that the moisture sensitive material (8) is arranged on a carrier material in the form of a coating.

9. A system according to claims 4 and 8, characterized in that at least part of the LC circuit (10,12) is formed by the coating.

10. A system according to any of the preceding claims, characterized in that the transmitter-receiver means (14) are designed as a transmission system for detecting an electromagnetic response signal generated by the at least one sensor (2.i), in response to the electromagnetic interrogation field.

11. A system according to claim 10, characterized in that, in use, the reading device (4.1) determines on the basis of the intensity of the detected response signal to what extent the at least one sensor (2.i) is in contact with moisture.

15.

12. A system according to claims 2 and 11, characterized in that the reading device (4.1) comprises a threshold circuit to determine whether the detected intensity is below a predetermined value.

13. A system according to any of claims 1-9, characterized in that the transmitter-receiver means (14) are designed as an absorption system for detecting energy taken up from the interrogation field by the at least one sensor (2.i) in response to the electromagnetic interrogation field.

14. A system according to claim 13, characterized in that, in use, the reading device (4.1) determines on the basis of the amount of energy absorbed by the at least one sensor (2.i) to what extent the at least one sensor (2.i) is in contact with moisture.

15. A system according to claims 2 and 13, characterized in that the reading device (4.1) comprises a threshold circuit (18) to determine whether the amount of energy absorbed is below a predetermined value.

16. A system according to any of the preceding claims, characterized in that the reading device (4.1) generates an alarm signal when moisture is detected by means of the at least one sensor.

17. A system according to any of the preceding claims, characterized in that the system (1) is also designed as an identification system in which the at least one sensor (2.i) comprises a microprocessor (22) connected with the resonant circuit (6), in which microprocessor (22) an identification code is stored, which identification code is passed to the resonant circuit (6) when the resonant circuit (6) is resonated by the electromagnetic interrogation field, and the reading device (4.1) being arranged to read the identification code by means of the electromagnetic interrogation field.

18. A system according to any of the preceding claims, characterized in that the system further comprises a central control unit (24) which is, optionally wirelessly, connected with the at least one reading device (4.1)

16.

for obtaining information about the presence of moisture at the at least one sensor (2.i).

19. A sensor (2.i) of the system according to any of the preceding claims.

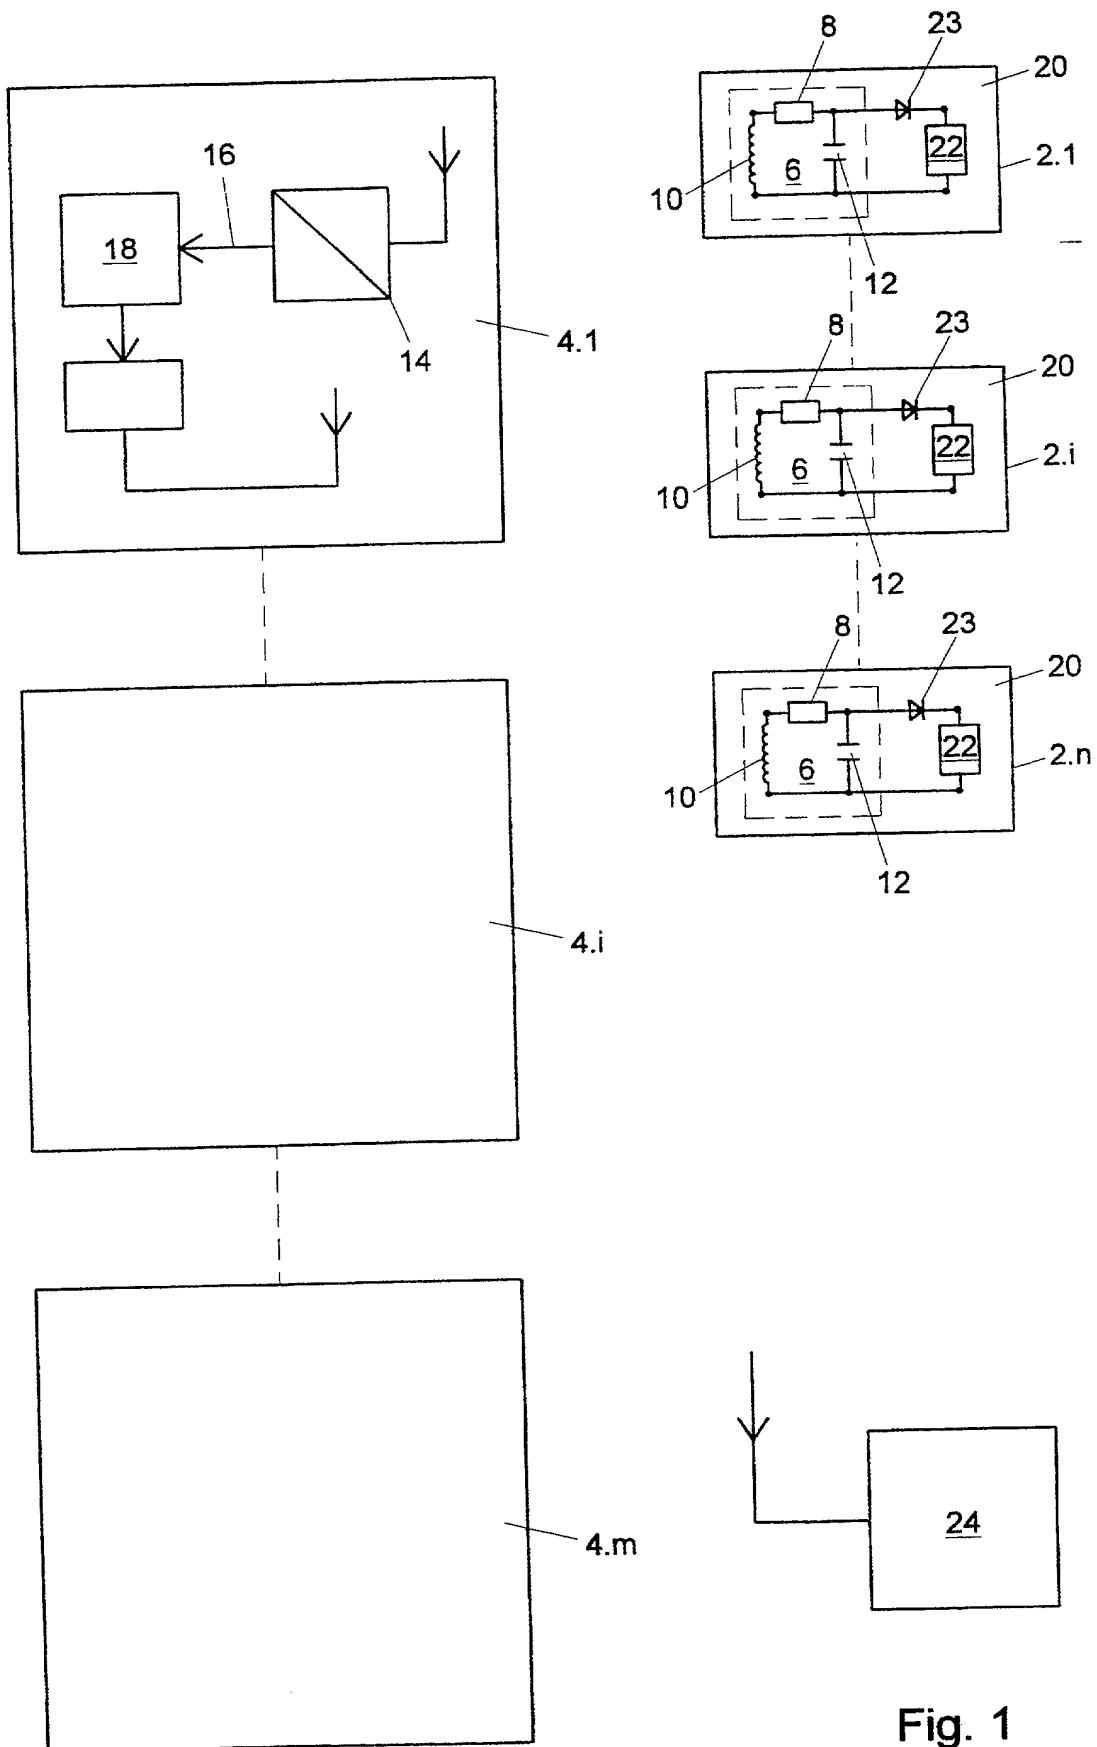


Fig. 1

FOOTPRINT 14898260

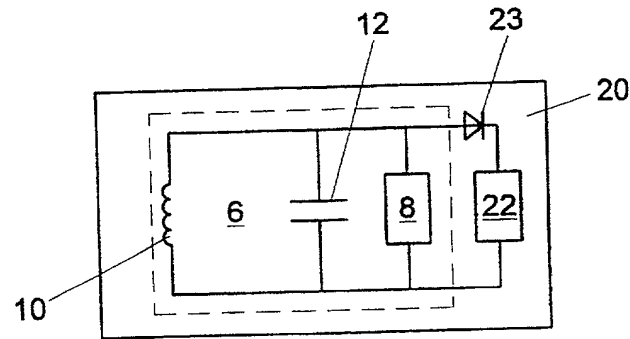


Fig. 3

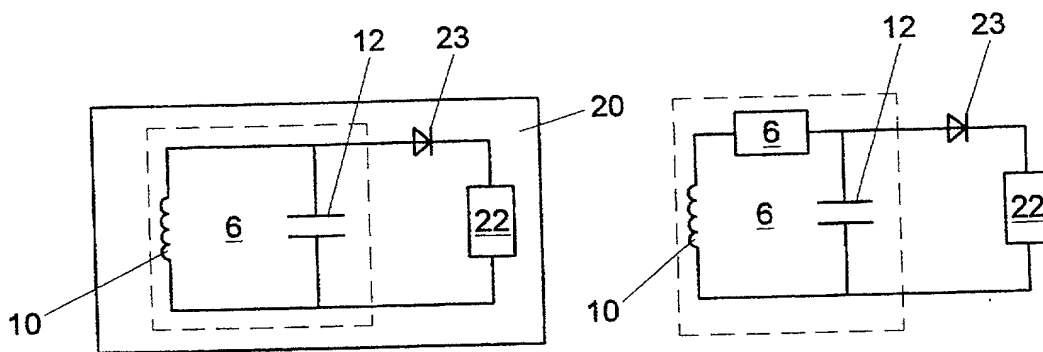


Fig. 4A

Fig. 4B

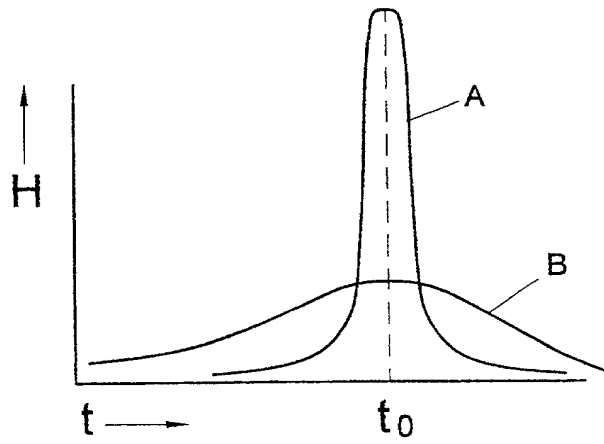


Fig. 2

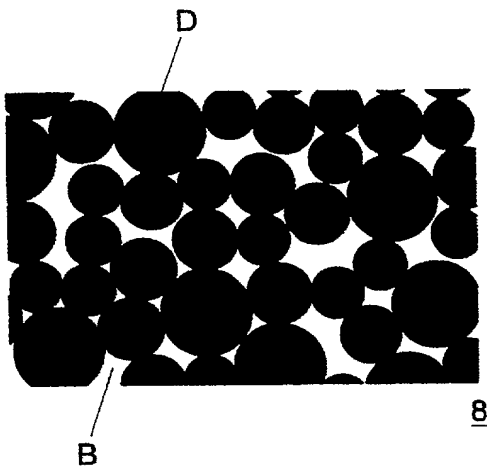


Fig. 5A

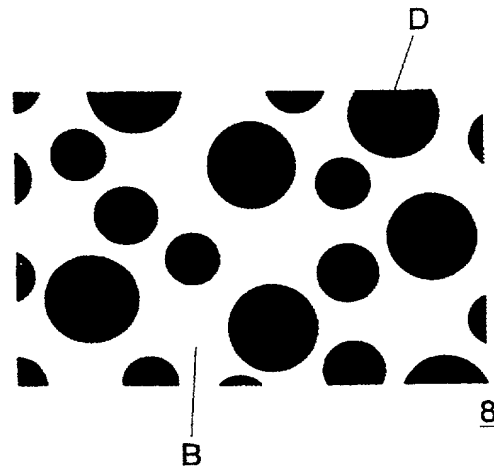


Fig. 5B

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through B/S000, OMB 0851-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.18 (e)) required)	Attorney Docket Number	310.1019
	First Named Inventor	van de Berg, Jan
	COMPLETE IF KNOWN	
	Application Number	09/786,841
	Filing Date	03/09/2001
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A SYSTEM FOR DETECTING THE PRESENCE OF MOISTURE

the specification of which (Title of the invention)

☐ is attached hereto
OR
☒ was filed on (MM/DD/YYYY) **03/09/2001** as United States Application Number or PCT International Application Number **09/786,841** and was amended on (MM/DD/YYYY) **03/09/2001** (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PCT/NL99/00562 NL 1010067	PCT Netherlands	10 September 1999 11 September 1998	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

(Page 1 of 2)

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

T06T60 "1488260

Please type a plus sign (+) inside this box ☐

PTO/SB/01 (12-97)

Approved for use through 03/00. OMB 0851-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 385(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U. S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number

022856

OR

☐ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name
		022856
		PATENT TRADEMARK OFFICE

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to:

☒ Customer Number or Bar Code Label


OR

☐ Correspondence address below

Name	022856				
Address	PATENT TRADEMARK OFFICE				
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:	<input type="checkbox"/> A petition has been filed for this unsigned inventor				
Given Name (first and middle (if any))			Family Name or Surname		
Jan			van de Berg		
Inventor's Signature				Date	13/9/01
Residence: City	Gouda	State		Country	The Netherlands
				Citizenship	Dutch
Post Office Address	Bloklandpolderstraat 15				
Post Office Address	2807 LH				
City	Gouda	State		ZIP	
				Country	The Netherlands

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

 0978544-094904
 106760-448260

Please type a plus sign (+) inside this box →

+

PTO/SB02A (3-97)

Approved for use through 8/30/98. OMB 0051-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)
Supplemental Sheet
Page 1 of 1

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Peter Hillebrand

de Haan

Inventor's
Signature

Date

13/9/01

Residence: City

Delft

State

Country

The Netherlands

Citizenship

Dutch

Post Office Address

Hof van Delflaan 118

Post Office Address

2613 BS

City

Delft

State

ZIP

Country

The Netherlands

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

0978544.091901